

SUB2400-BL

Powerful passive dual 10" subwoofer, black



The SUB2400 is a powerful passive dual 10" subwoofer that will deliver an incredible punchy bass that makes your trousers vibrate. Together with the MASK6 or MASK8 cabinet loudspeakers and the 3 channel digital amplifier (CHAMP-3D) you get a perfect and fail-safe sound system that is suitable for bars, pubs, clubs, restaurants, taverns... where often "dance level" music is required.

This subwoofer has two band pass chambers where each chamber is equipped with a 10" dual coil woofer. Together with the push-pull technology this results in a relative small cabinet with a huge output and very low distortion. Thanks to the small size of the woofers, less mass has to be moved.


The bass reproduction is a lot more "punchy" and "faster" compared to 15" or 18" cabinets. The SUB2400 has been compared with a single 15" and 18" subwoofers and the results were astonishing in favour of the SUB2400!

SUB2400 can be driven in 4 ohms or 16 ohms mode. Selection is done by the big switch at the back of the subwoofer. Especially with long cable runs, the 16 ohms mode is advised. Less power is lost and the bass response will be a lot better. The 16 ohms mode also allows you to use multiple cabinets.

TECHNICAL SPECIFICATIONS

| | | | |
|--------------------------------------|---------------|--|----------------------------|
| height in mm | 700 | width in mm | 352 |
| depth in mm | 450 | loudspeaker system | dual coil |
| woofer size in inch | 2 x 10 | woofer cone material | paper |
| colour | black / white | impedance (ohms) | 4 or 16 |
| low impedance dynamic power in watts | 600 | low impedance RMS power in watts | 300 |
| SPL 1W/1m in dB | 99 | max SPL 1m in dB | 133 |
| frequency response in Hz | 45 - 150 | main construction material | plywood |
| IP rating | | closest RAL colour (subject to deviations) | RAL9003 (W) / RAL9011 (BL) |
| Net weight product (kg) | 29,20 | | |

MORE PICTURES

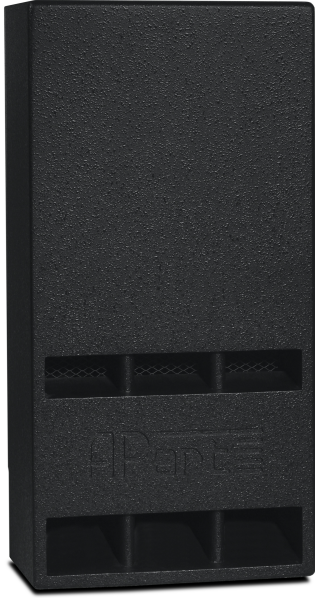

ACCESSORIES**STT**

T-adapter for 2 MASK8 on one pole

**STSUB**

Pole stand for MASK8 onto Sub with pole adapter